

STATOIL CYLWAY FZ 460

Cylinder Oil

APPLICATIONS

CylWay FZ 460 is recommended for some worm and screw gears, and for oil-lubed propeller shafts.

ADVANTAGES

CylWay FZ 460 has a low tendency to form carbon deposits. It has good adhesiveness and high capacity to absorb water.

CHARACTERISTICS

CylWay FZ 460 is a cylinder oil based on highly refined paraffin base oil. It is highly stable against oxidation, which means that the oil is very unlikely to produce carbon deposits. CylWay FZ 460 is compounded, to improve the oil's adhesiveness, and to increase its capacity to absorb water.

TYPICAL INSPECTIONS

CHARACTERISTICS	METHODS	UNITS	
ISO VG	-	-	460
Density at 15 °C	ASTM D 4052	kg/m ³	912
Viscosity at 40 °C	ASTM D 445	mm ² /s	460
Viscosity at 100 °C	ASTM D 445	mm ² /s	31
Viscosity Index	ASTM D 2270	-	96
Pour Point	ASTM D 97	°C	-9
Flash Point COC	ASTM D 92	°C	304

HANDLING AND STORAGE

Avoid skin contact.
Wash thoroughly with soap and water, after skin contact.
Dispose of used oils properly.
Safety data sheet available for professional user on request.

The right to change product specifications is reserved.




Statoil Lubricants, 118 88 Stockholm.

Customer service tel 08-429 68 50, fax 08-429 68 51, email: smobest@statoil.com

2005-11-16

Friction Fighters[™]



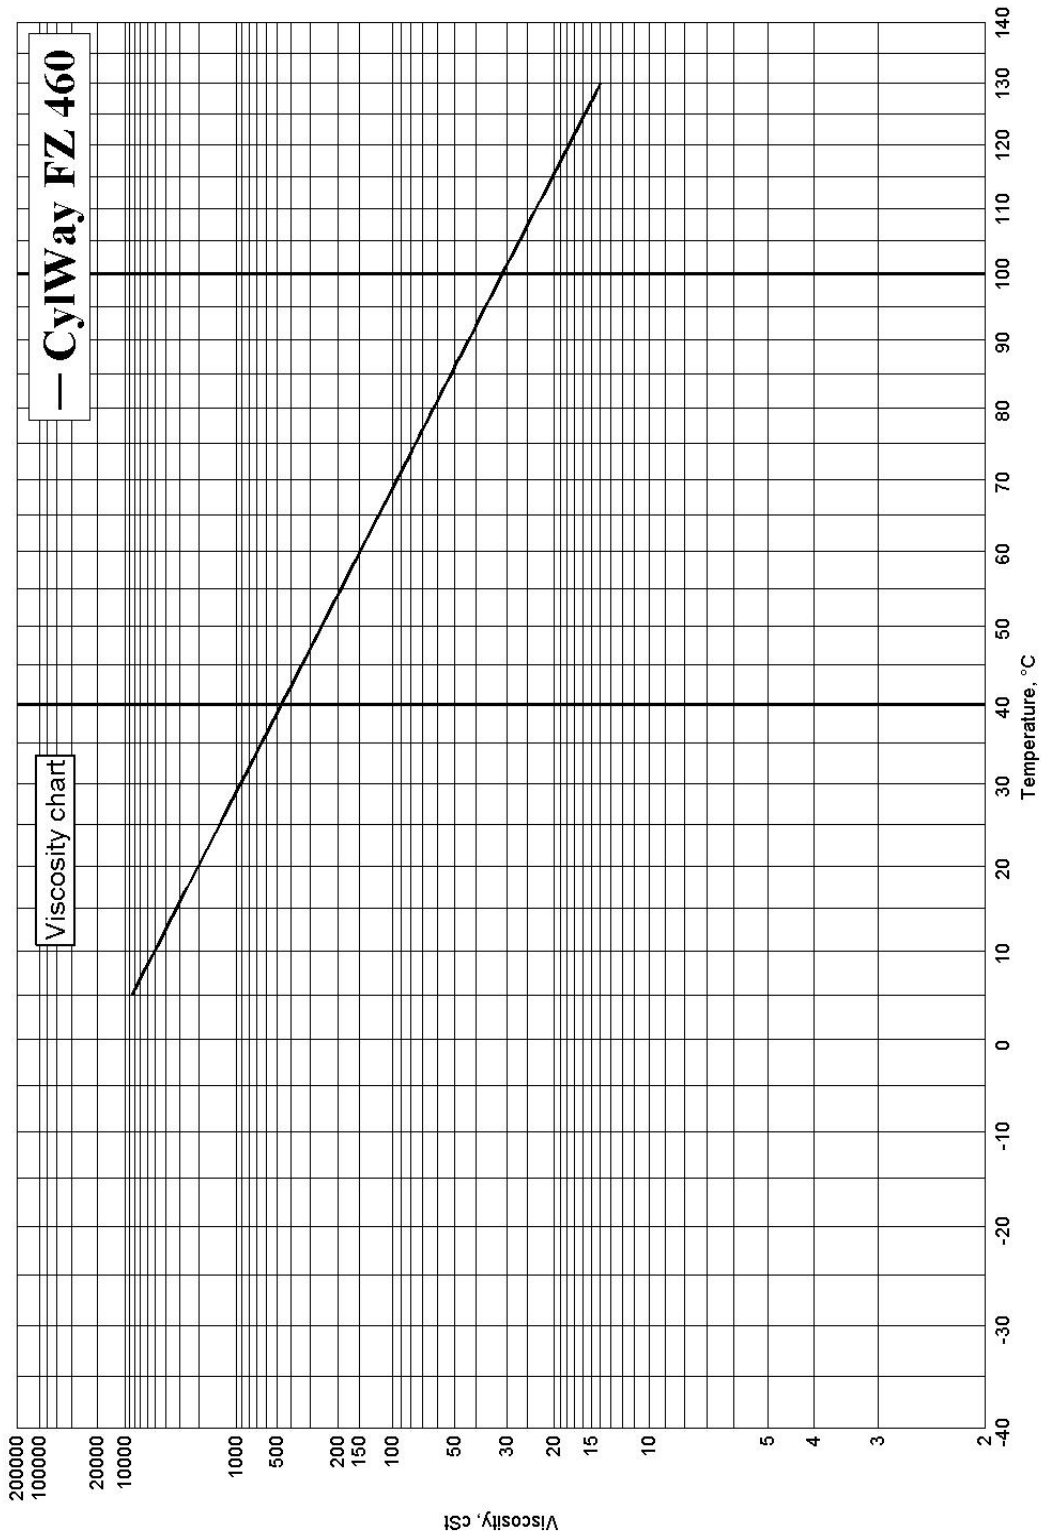

Statoil Lubricants, 118 88 Stockholm.

Customer service tel 08-429 68 50, fax 08-429 68 51, email: smobest@statoil.com

Friction Fighters™

