

STATOIL WHITEWAY 15

Technical white oil

APPLICATIONS

Within a large number of manufaction areas there is a need for totally colourfree mineral oils. They are used in applications, to avoid the miscolouring of products or where it is crucial that the manufactured goods is not contaminated with spatter from the machinery.

Technical white oils are used in a wide range of applications in food processing. They are also used as dustbinders and plasticizers for example for polystyrene manufacturing. In addition they are used as processing oils in chemical-technical industry.

ADVANTAGES

WhiteWay 15 is odour free and does not miscolour manufactured goods.

TYPICAL INSPECTIONS

CHARACTERISTICS	METHODS	UNITS	
Density at 15 °C	ASTM D 4052	kg/m ³	847
Viscosity at 40 °C	ASTM D 445	mm ² /s	15.0
Viscosity at 100 °C	ASTM D 445	mm ² /s	3.4
Viscosity at 20 °C	ASTM D 445	mm ² /s	34.0
Pour Point	ASTM D 97	°C	-12
Flash Point COC	ASTM D 92	°C	184
Color Saybolt	ASTM D 157	-	+30

TESTS AND APPROVALS

FDA 21CFR 178.3620 (b)

The right to change product specifications is reserved.

CHARACTERISTICS

WhiteWay 15 is a technical white oil refined from paraffinic base oil. White oils have good chemical and thermic stability and do not miscolour the manufactured goods.

HANDLING AND STORAGE

Avoid skin contact.
Wash thoroughly with soap and water, after skin contact.
Dispose of used oils properly.
Safety data sheet available for professional user on request.




Statoil Lubricants, 118 88 Stockholm.

Customer service tel 08-429 68 50, fax 08-429 68 51, email: smobest@statoil.com

2008-09-29

Friction Fighters™

STATOIL

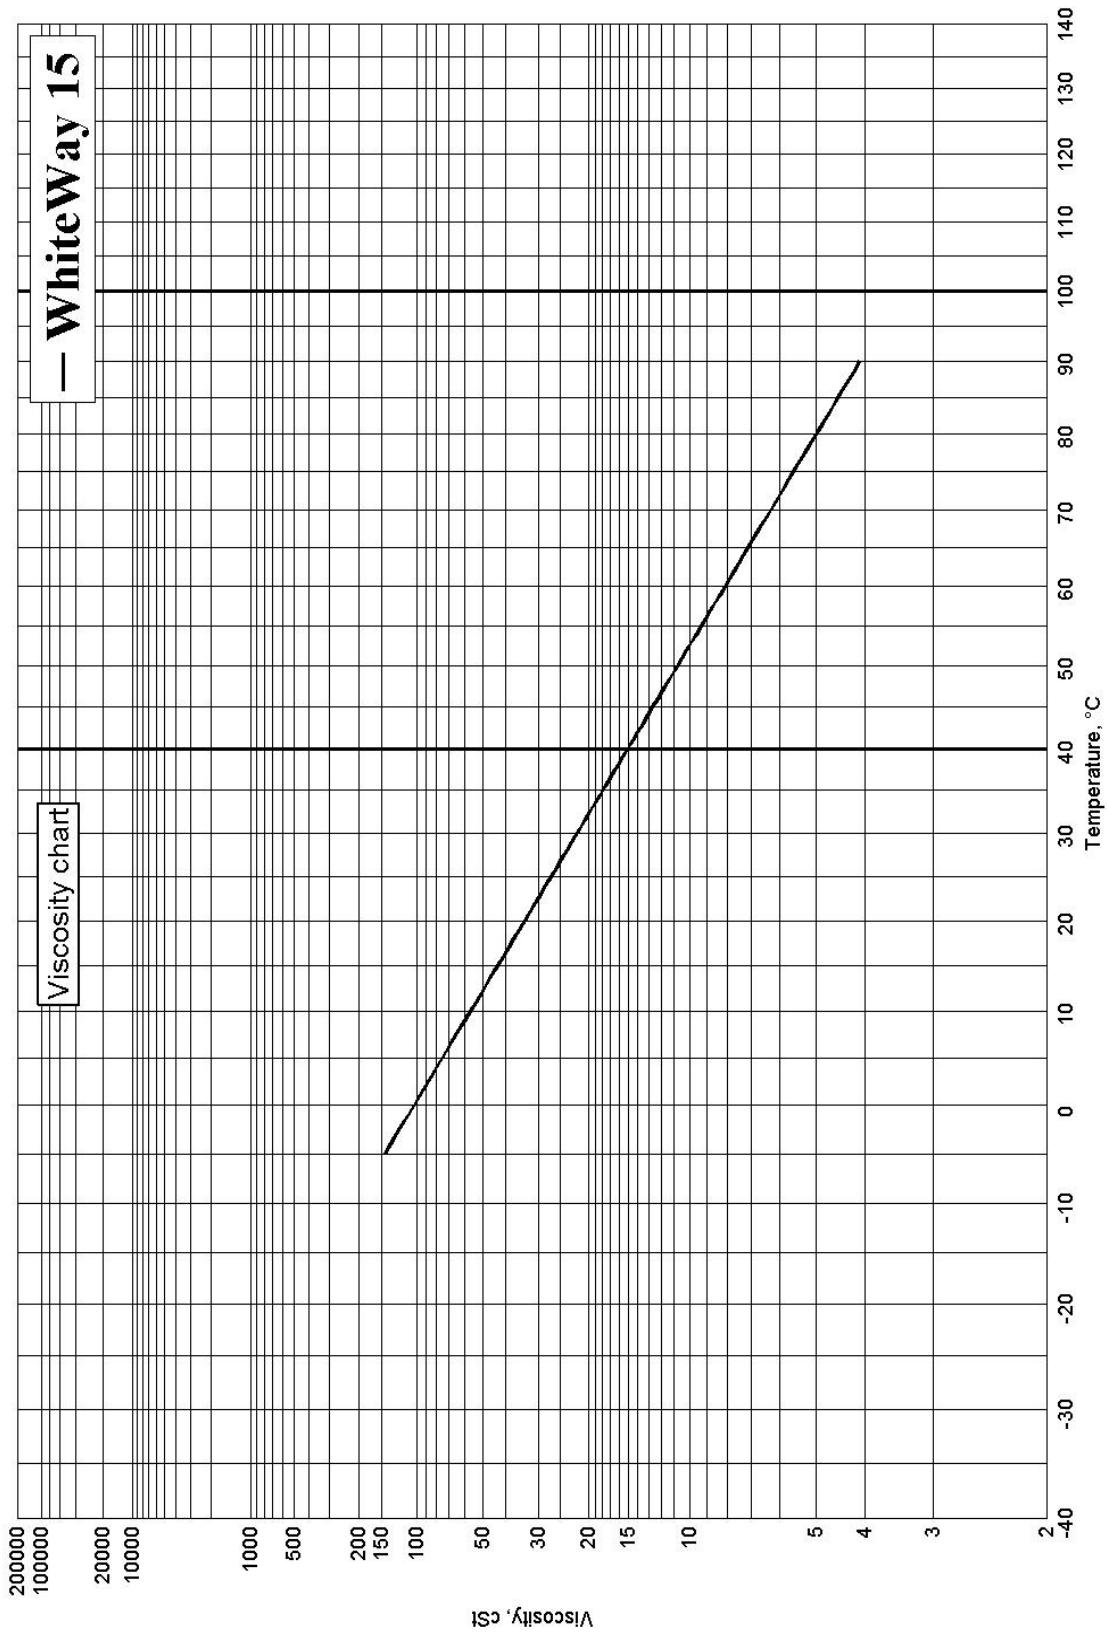

Statoil Lubricants, 118 88 Stockholm.

Customer service tel 08-429 68 50, fax 08-429 68 51, email: smobest@statoil.com

Friction Fighters™

STATOIL